



### Bronze double regulating and commissioning valves PN 16 "Hydrocontrol R"

#### Function:

Oventrop double regulating and commissioning valves are installed in the pipework of hot water central heating systems and cooling systems as well as potable water systems according to DIN 1988 (here especially in circulation pipes) and serve to achieve a hydronic balance between the various circuits of the system.

The balance is achieved by a presetting with memory position.

The required values of presetting can be obtained from the flow charts. All intermediate values are infinitely adjustable.

The selected presetting can be read off two scales (basic scale and fine adjustment scale, see illustration presetting). The Oventrop double regulating and commissioning valves have 2 threaded ports for fill and drain ball valves or pressure test points for the measurement of differential pressure. The double regulating and commissioning valves are delivered with 2 blind plugs.

The double regulating and commissioning valves may be installed in either the supply or the return pipe.

When installing the valve, it must be ensured that the direction of flow conforms with the direction of the arrow on the valve body and that the valve is installed with a minimum of 3 D (3 x nominal pipe diameter) of straight pipe at the valve inlet and of 2 D (2 x nominal pipe diameter) of straight pipe at the valve outlet.

The flow charts are valid for both cases, provided the direction of flow conforms with the arrow embossed on the valve body.


In cooling systems using mixtures of water and glycol, the correction factors related to the indicated chart values have to be taken into consideration.

#### Advantages:

- the location of the functioning components on one level allows a simple assembly and easy operation
- only one valve for 5 functions:
  - presetting
  - measuring
  - isolating
  - filling
  - draining
- the supply and the return pipe can be marked by use of the colour rings supplied with each valve
- low pressure loss (oblique pattern)
- infinitely adjustable presetting, exact measurement of pressure loss and flow by means of the pressure test points
- threads according to EN 10226 (BS 21), suitable for Oventrop compression fittings (one edge olive) for copper pipes with a max. diameter of 22 mm and the Oventrop composition pipe "Copipe" 14 and 16 mm
- fill and drain ball valve with internal stop and pressure test point with O-ring seal between valve body and test point (not additional seals required)
- patented measuring channel led around the stem assembly to the test points ensures the best possible accuracy between the differential pressure measured at the pressure test points and the actual differential pressure of the valve (see chart indicating flow rate tolerances on page 3.5-8)



Bronze double regulating and commissioning valve PN 16 "Hydrocontrol R"

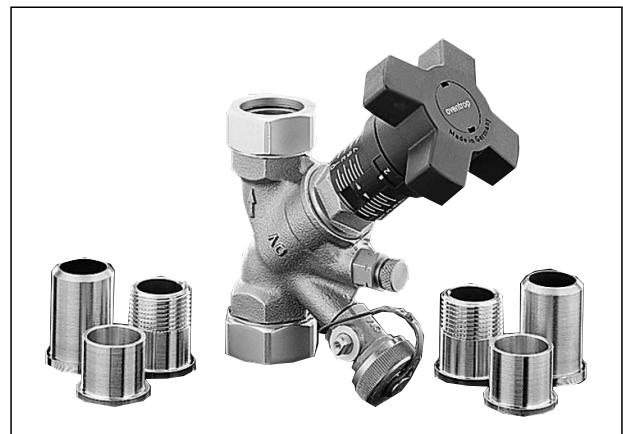

Male threads for weldable steel tailpipes  
DN 10 to DN 50  
or:  
... for solder tailpipes 15 mm  $\varnothing$  to 42 mm  $\varnothing$   
  
or:  
... for threaded tailpipes DN 10 to DN 40



Female thread according to EN 10226 (BS 21)  
DN 10 to DN 65

**Double regulating and commissioning valve “Hydro-control R” both ports with female thread according to EN 10226 (BS 21)**

**Measuring technic “classic”**

**Tender specification:**

Double regulating and commissioning valve PN 25 (pH value 6.5-10) (DN 65: PN 16), both ports with female thread according to EN 10226 (BS 21), between -20°C and +150°C, not suitable for steam. Colour rings for marking of supply and return pipe, oblique pattern with secured, infinitely adjustable fine presetting controllable at any time; optical display of the presetting depending on the position of the handwheel, valve and bonnet made of bronze (Rg 5), disc and stem made of brass resistant to de-zincification (DZR), disc with PTFE seal, maintenance-free stem seal due to double O-ring, all functioning components on one level, pressure test point and fill and drain ball valve interchangeable, installation in the supply or the return pipe. Suitable for potable water installations according to DIN 1988. DN 15 to DN 32 according to DIN 3546, part 1 (PN 10) DVGW and SVGW tested and registered.

(Pressure loss charts, kv and Zeta values, see following pages)

Double regulating and commissioning valves both ports with female thread according to EN 10226 (BS 21) with threaded ports for accessories sets (closed with blind plugs)

DN	Item no.
DN 10 3/8"	106 01 03
DN 15 1/2"	106 01 04
DN 20 3/4"	106 01 06
DN 25 1"	106 01 08
DN 32 1 1/4"	106 01 10
DN 40 1 1/2"	106 01 12
DN 50 2"	106 01 16
DN 65 2 1/2"	106 01 20

both ports female thread according to EN 10226 (BS 21) with mounted accessories set no. 2 = 2 pressure test points 1/4"


DN	Item no.
DN 10 3/8"	106 02 03
DN 15 1/2"	106 02 04
DN 20 3/4"	106 02 06
DN 25 1"	106 02 08
DN 32 1 1/4"	106 02 10
DN 40 1 1/2"	106 02 12
DN 50 2"	106 02 16

both ports female thread according to EN 10226 (BS 21) with mounted accessories set no. 3 = 1 pressure test point 1/4" and 1 fill and drain ball valve 1/4"


DN	Item no.
DN 10 3/8"	106 03 03
DN 15 1/2"	106 03 04
DN 20 3/4"	106 03 06
DN 25 1"	106 03 08
DN 32 1 1/4"	106 03 10
DN 40 1 1/2"	106 03 12
DN 50 2"	106 03 16

**Accessories sets:**


1 fill and drain ball valve	106 01 91
2 pressure test points	106 02 81
1 pressure test point	
1 fill and drain ball valve	106 03 81
1 extension for accessories sets (80 mm)	106 02 95
1 extension for accessories sets (40 mm)	168 82 95
1 measuring adapter	106 02 98
1 stem extension (DN 10 – DN 50, 35 mm)	168 82 96

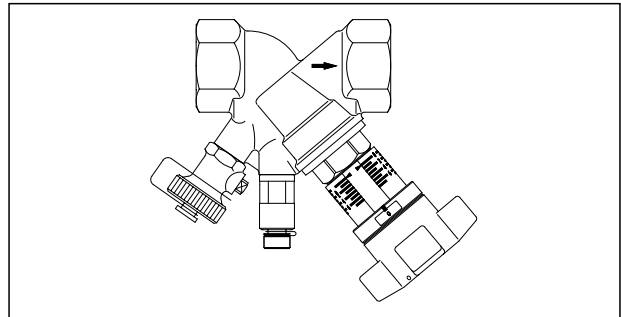

both ports female thread according to EN 10226 (BS 21), item no.106 03 . .

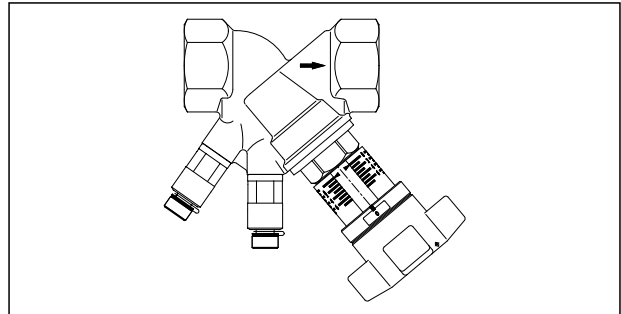


both ports female thread according to EN 10226 (BS 21), item no. 106 02 . .

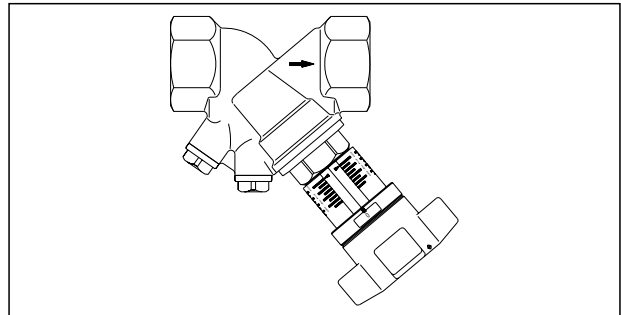

both ports female thread according to EN 10226 (BS 21), item no. Nr. 106 01 . .

**Dimensions:**

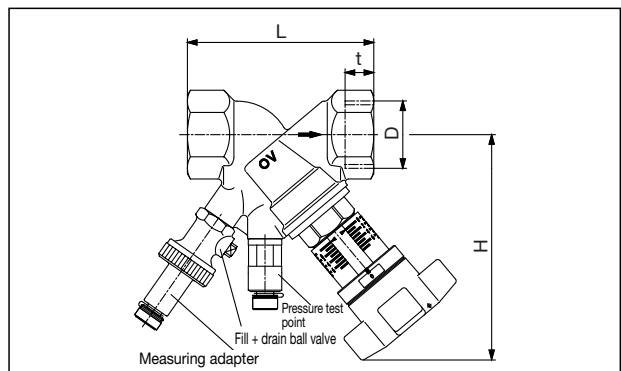

DN	D EN 10226	t	L	H
10	3/8"	10.1	73	114
15	1/2"	13.2	80	114
20	3/4"	14.5	84	116
25	1"	16.8	97,5	119
32	1 1/4"	19.1	110	136
40	1 1/2"	19.1	120	138
50	2"	25.7	150	148
65	2 1/2"	20.0	151	210

**Double regulating and commissioning valve "Hydrocontrol R" both ports with male thread and collar nut  
Measuring technic "classic"**


**Tender specification:**

Double regulating and commissioning valve PN 16 (PN 20 for cold water, pH value 6.5-10), both ports with male thread and collar nut for weldable, solder and threaded tailpipes, flat sealing, between -20°C and +150°C, not suitable for steam. Colour rings for marking of supply and return pipe, oblique pattern with secured, infinitely adjustable fine presetting controllable at any time; optical display of the presetting depending on the position of the handwheel, valve body and bonnet made of bronze (Rg 5), disc and stem made of brass resistant

to dezincification (DZR), disc with PTFE seal, maintenance-free stem seal due to double O-ring, all functioning components on one level, pressure test point and fill and drain ball valve interchangeable, installation in the supply or the return pipe. Suitable for potable water installations according to DIN 1988. DN 15 to DN 32 according to DIN 3546, part 1 (PN 10) DVGW and SVGW tested and registered.

DN 10 to DN 50 with type approval certificate for shipbuilding. (Pressure loss charts, kv and Zeta values, see following pages)

**Dimensions:**

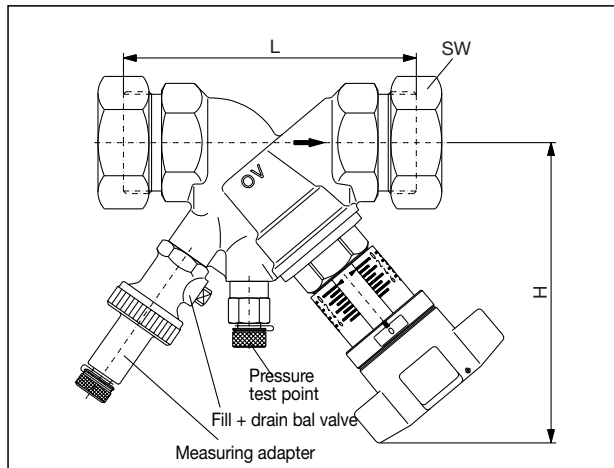

DN	L	H	SW*
10	86	114	26
15	88	114	30
20	93	116	37
25	110	119	46
32	110	136	52
40	120	138	58
50	150	148	75

\* SW = spanner size

**Dimensions:**

DN	D1	L1	L2	D2 EN 10226	L3	L4	D3	L5	D4 EN 10226	L6	L7
10	-	-	-	3/8"	25	10.1	16	50	-	-	-
15	15	18	12	1/2"	31	13.2	20.5	50	1/2"	37	13.2
20	18	23	15	3/4"	34	14.5	26	50	3/4"	39	14.5
20	22	24	17	-	-	-	-	-	-	-	-
25	28	27	20	1"	40	16.8	33	60	1 1/4"	53	16.8
32	35	32	25	1 1/4"	46	19.1	41	60	1 1/4"	55	19.1
40	42	37	29	1 1/2"	49	19.1	47.5	65	-	-	-
50	54	50	40	-	-	-	60	65	-	-	-

Double regulating and commissioning valves both ports male thread and collar nut, with threaded ports for accessories sets (closed with blind plugs)

	Item no.
DN 10 3/8"	106 05 03
DN 15 1/2"	106 05 04
DN 20 3/4"	106 05 06
DN 25 1"	106 05 08
DN 32 1 1/4"	106 05 10
DN 40 1 1/2"	106 05 12
DN 50 2"	106 05 16

**Accessories sets:**

1 fill and drain ball valve	106 01 91
2 pressure test points	106 02 81
1 pressure test point	
1 fill and drain ball valve	106 03 81
1 extension for accessories sets (80 mm)	106 02 95
1 extension for accessories sets (40 mm)	168 82 95
1 measuring adapter	106 02 98
1 stem extension (DN 20 to DN 50, 35 mm)	168 82 96

**Tailpipe sets:**

2 weldable tailpipes	
3/8"	106 05 91
1/2"	106 05 92
3/4"	106 05 93
1"	106 05 94
1 1/4"	106 05 95
1 1/2"	106 05 96
2"	106 05 97

**2 solder tailpipes**

15 mm DN 15	106 10 92
18 mm DN 20	106 10 93
22 mm DN 20	106 10 94
28 mm DN 25	106 10 95
35 mm DN 32	106 10 96
42 mm DN 40	106 10 97
54 mm DN 50	106 10 98

**2 tailpipes with male thread**


3/8"	106 14 91
1/2"	106 14 92
3/4"	106 14 93
1"	106 14 94
1 1/4"	106 14 95
1 1/2"	106 14 96

**2 tailpipes with female thread**

1/2"	101 93 64
3/4"	101 93 66
1"	106 13 94
1 1/4"	106 13 95


Flow charts for double regulating and commissioning valves:

DN 10

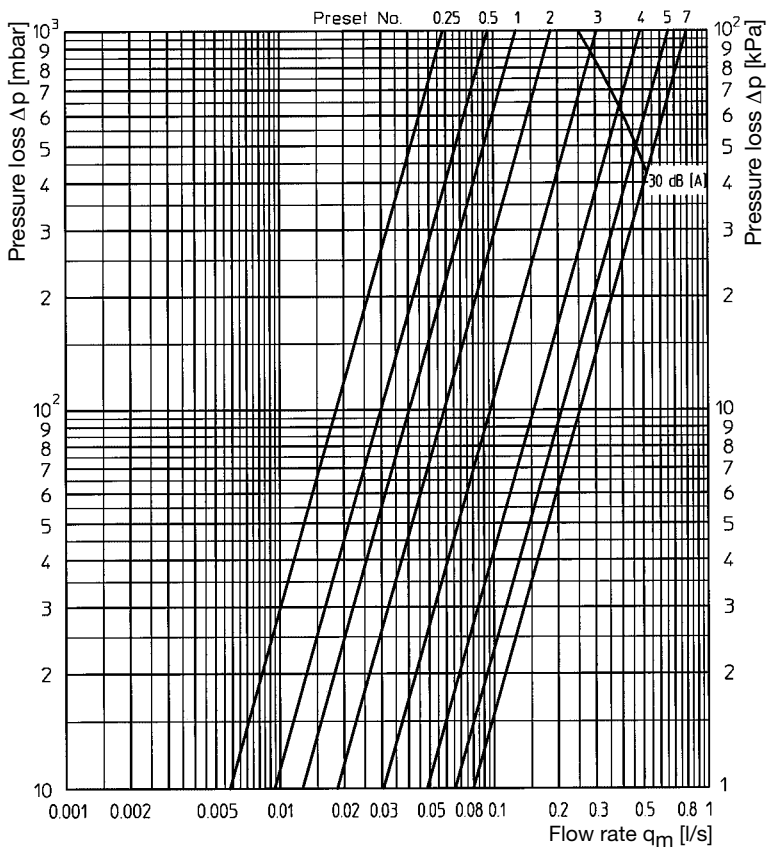

Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
0.25	0.21	885						
0.5	0.34	335						
0.75	0.40	244						
1.	0.46	184	5.	2.37	6.9			
1.1	0.48	169	5.1	2.42	6.7			
1.2	0.50	156	5.2	2.47	6.4			
1.3	0.52	144	5.3	2.52	6.1			
1.4	0.54	134	5.4	2.56	6.0			
1.5	0.56	124	5.5	2.60	5.8			
1.6	0.58	116	5.6	2.63	5.6			
1.7	0.60	108	5.7	2.66	5.5			
1.8	0.63	98	5.8	2.69	5.4			
1.9	0.65	92	5.9	2.72	5.3			
2.	0.67	87	6.	2.75	5.2			
2.1	0.70	80	6.1	2.77	5.1			
2.2	0.73	73	6.2	2.79	5.0			
2.3	0.76	68	6.3	2.81	4.9			
2.4	0.79	63	6.4	2.83	4.9			
2.5	0.83	57	6.5	2.84	4.8			
2.6	0.87	52	6.6	2.85	4.8			
2.7	0.91	47	6.7	2.86	4.8			
2.8	0.96	42	6.8	2.87	4.7			
2.9	1.03	37	6.9	2.87	4.7			
3.	1.10	32	7.	2.88	4.7			
3.1	1.16	29						
3.2	1.23	26						
3.3	1.29	23						
3.4	1.36	21						
3.5	1.42	19						
3.6	1.49	18						
3.7	1.56	16						
3.8	1.62	15						
3.9	1.69	14						
4.	1.76	13						
4.1	1.82	12						
4.2	1.88	11						
4.3	1.94	10						
4.4	2.00	9.8						
4.5	2.06	9.2						
4.6	2.12	8.7						
4.7	2.19	8.1						
4.8	2.25	7.7						
4.9	2.31	7.3						


DN 15

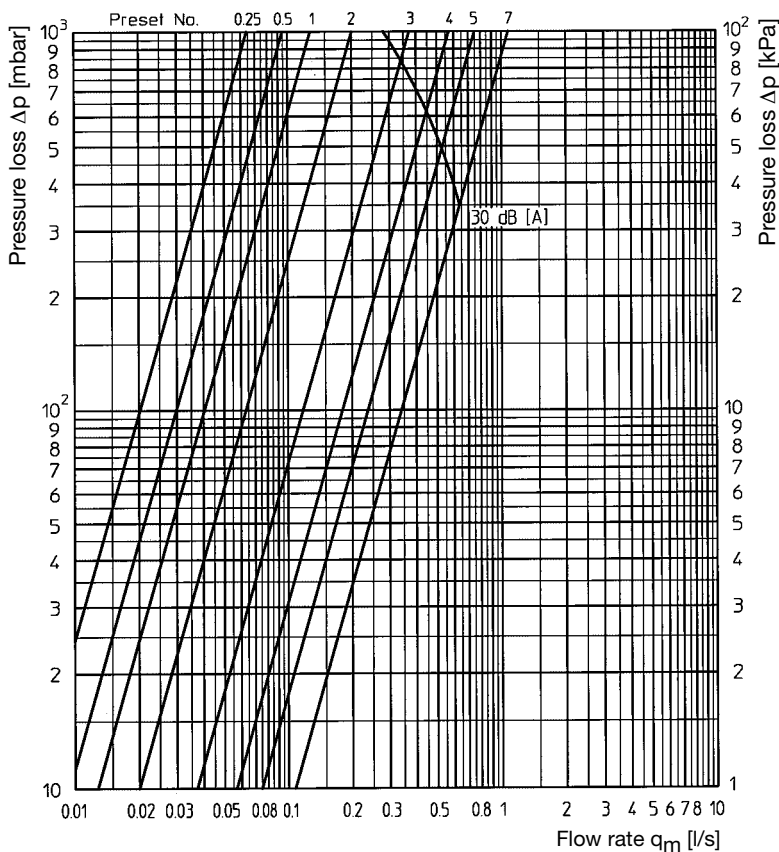

Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
0.25	0.23	1981						
0.5	0.34	906						
0.75	0.40	655						
1.	0.46	495	5.	2.70	14			
1.1	0.48	455	5.1	2.77	14			
1.2	0.50	419	5.2	2.84	13			
1.3	0.52	388	5.3	2.92	12			
1.4	0.55	346	5.4	2.99	12			
1.5	0.57	323	5.5	3.06	11			
1.6	0.60	291	5.6	3.13	11			
1.7	0.63	264	5.7	3.20	10			
1.8	0.66	241	5.8	3.27	9.8			
1.9	0.69	220	5.9	3.34	9.4			
2.	0.72	202	6.	3.40	9.1			
2.1	0.76	181	6.1	3.47	8.7			
2.2	0.80	164	6.2	3.54	8.4			
2.3	0.85	145	6.3	3.61	8.0			
2.4	0.91	127	6.4	3.67	7.8			
2.5	0.98	109	6.5	3.72	7.6			
2.6	1.05	95	6.6	3.76	7.4			
2.7	1.12	84	6.7	3.79	7.3			
2.8	1.20	73	6.8	3.82	7.2			
2.9	1.27	65	6.9	3.85	7.1			
3.	1.34	58	7.	3.88	7			
3.1	1.41	53						
3.2	1.48	48						
3.3	1.55	44						
3.4	1.62	40						
3.5	1.70	36						
3.6	1.77	33						
3.7	1.84	31						
3.8	1.91	29						
3.9	1.98	27						
4.	2.05	25						
4.1	2.12	23						
4.2	2.18	22						
4.3	2.24	21						
4.4	2.31	20						
4.5	2.38	18						
4.6	2.44	18						
4.7	2.51	17						
4.8	2.57	16						
4.9	2.63	15						


Flow charts for double regulating and commissioning valves:

DN 20

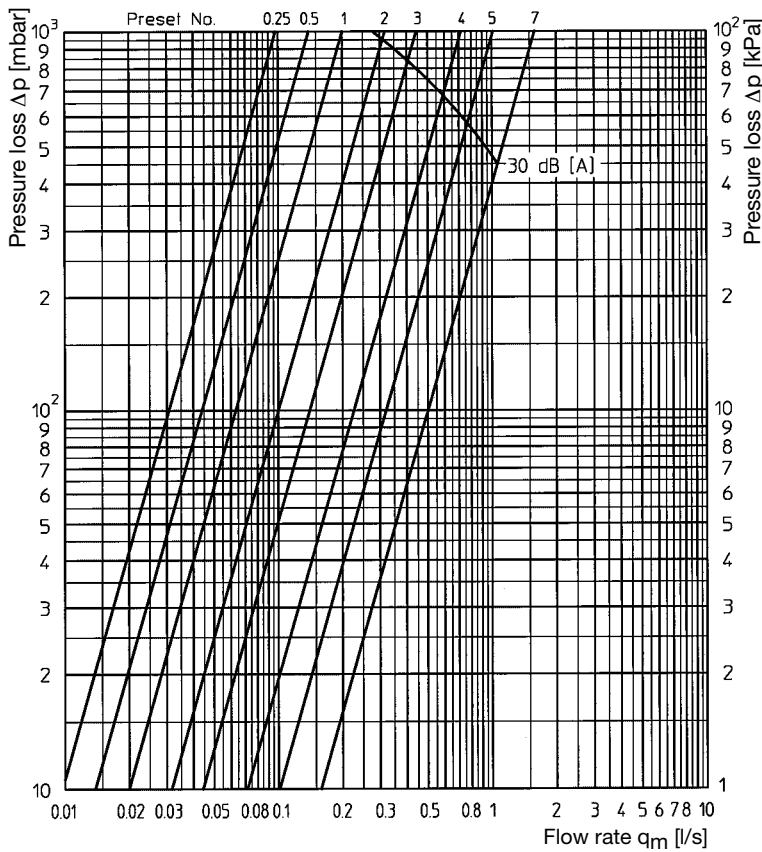

Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
0.25	0,35	2841						
0.5	0,50	1392						
0.75	0,63	877						
1.	0,72	671	5.	3,65	26			
1.1	0,76	603	5.1	3,78	24			
1.2	0,81	530	5.2	3,90	23			
1.3	0,85	482	5.3	4,02	22			
1.4	0,89	439	5.4	4,15	20			
1.5	0,93	402	5.5	4,27	19			
1.6	0,97	370	5.6	4,40	17			
1.7	1,01	341	5.7	4,52	17			
1.8	1,05	316	5.8	4,65	16			
1.9	1,10	288	5.9	4,77	15			
2.	1,14	268	6.	4,89	15			
2.1	1,18	250	6.1	5,02	14			
2.2	1,22	234	6.2	5,15	13			
2.3	1,26	219	6.3	5,28	12			
2.4	1,30	206	6.4	5,36	12			
2.5	1,35	191	6.5	5,44	12			
2.6	1,40	178	6.6	5,50	12			
2.7	1,45	166	6.7	5,56	11			
2.8	1,50	155	6.8	5,61	11			
2.9	1,55	145	6.9	5,66	11			
3.	1,60	136	7.	5,71	11			
3.1	1,66	126						
3.2	1,74	115						
3.3	1,82	105						
3.4	1,93	93						
3.5	2,04	84						
3.6	2,15	75						
3.7	2,25	69						
3.8	2,36	62						
3.9	2,47	57						
4.	2,58	52						
4.1	2,69	48						
4.2	2,80	44						
4.3	2,91	41						
4.4	3,01	38						
4.5	3,12	36						
4.6	3,23	33						
4.7	3,34	31						
4.8	3,44	29						
4.9	3,55	28						


DN 25

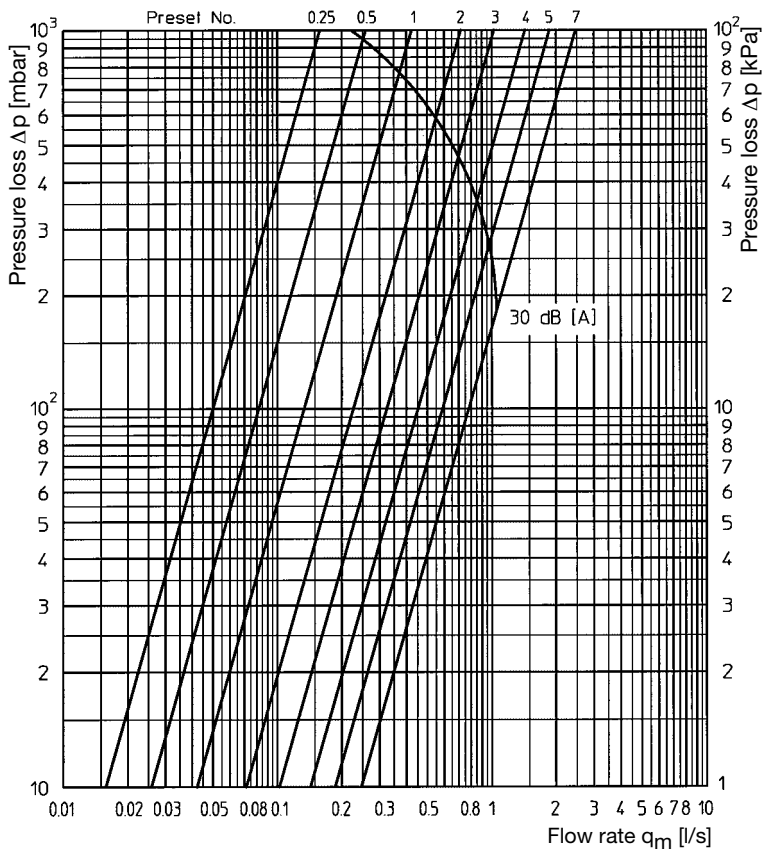

Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
0.25	0,57	2774						
0.5	0,93	1042						
0.75	1,22	605						
1.	1,52	390	5.	6,72	20			
1.1	1,64	335	5.1	6,84	19			
1.2	1,76	291	5.2	6,96	19			
1.3	1,87	258	5.3	7,08	18			
1.4	1,98	230	5.4	7,20	17			
1.5	2,08	208	5.5	7,32	17			
1.6	2,18	190	5.6	7,44	16			
1.7	2,28	173	5.7	7,56	16			
1.8	2,38	159	5.8	7,68	15			
1.9	2,48	147	5.9	7,80	15			
2.	2,58	135	6.	7,91	14			
2.1	2,67	126	6.1	8,02	14			
2.2	2,77	117	6.2	8,12	14			
2.3	2,87	109	6.3	8,22	13			
2.4	2,98	101	6.4	8,31	13			
2.5	3,09	94	6.5	8,41	13			
2.6	3,20	88	6.6	8,51	12			
2.7	3,31	82	6.7	8,61	12			
2.8	3,43	77	6.8	8,71	12			
2.9	3,56	71	6.9	8,80	12			
3.	3,69	66	7.	8,89	11			
3.1	3,82	62						
3.2	3,96	57						
3.3	4,11	53						
3.4	4,26	50						
3.5	4,42	46						
3.6	4,57	43						
3.7	4,72	40						
3.8	4,87	38						
3.9	5,02	36						
4.	5,16	34						
4.1	5,32	32						
4.2	5,47	30						
4.3	5,63	28						
4.4	5,79	27						
4.5	5,95	25						
4.6	6,10	24						
4.7	6,26	23						
4.8	6,42	22						
4.9	6,57	21						


Flow charts for double regulating and commissioning valves:

DN 32

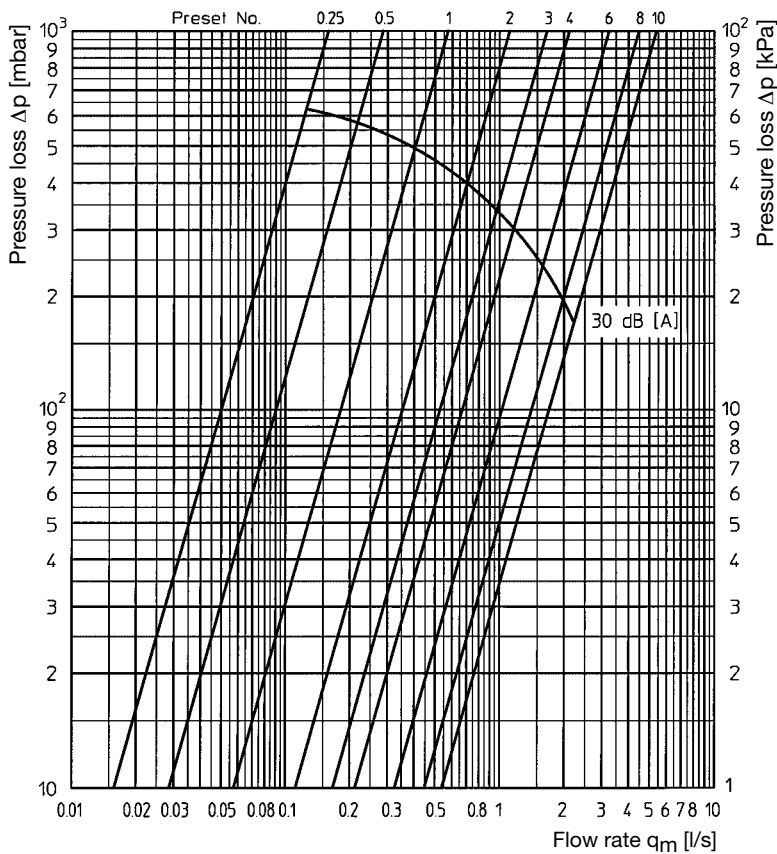

Turn	$k_V$ -value	Zeta-value	Turn	$k_V$ -value	Zeta-value	Turn	$k_V$ -value	Zeta-value
0.25	0.57	8174						
0.5	1.03	2503						
0.75	1.53	1135						
1.	2.06	626						
1.1	2.20	549	5.	9.69	28	9	18,18	8,0
1.2	2.35	481	5.1	9,90	27	9.1	18,35	7,9
1.3	2.52	418	5.2	10,10	26	9.2	18,50	7,8
1.4	2.70	364	5.3	10,30	25	9.3	18,65	7,6
1.5	2.90	316	5.4	10,50	24	9.4	18,80	7,5
1.6	3.10	276	5.5	10,70	23	9.5	18,93	7,4
1.7	3.32	241	5.6	10,90	22	9.6	19,05	7,3
1.8	3.55	211	5.7	11,10	22	9.7	19,15	7,2
1.9	3.78	186	5.8	11,30	21	9.8	19,25	7,2
			5.9	11,50	20	9.9	19,35	7,1
2.	4.02	164	6.	11.70	19	10.	19,45	7,0
2.1	4.25	147	6.1	11,90	19			
2.2	4.48	132	6.2	12,12	18			
2.3	4.68	121	6.3	12,35	17			
2.4	4.88	112	6.4	12,57	17			
2.5	5.08	103	6.5	12,80	16			
2.6	5.25	96	6.6	13,00	16			
2.7	5.45	89	6.7	13,22	15			
2.8	5.65	83	6.8	13,45	15			
2.9	5.83	78	6.9	13,68	14			
3.	6.00	74	7.	13,91	14			
3.1	6.17	70	7.1	14,13	13			
3.2	6.35	66	7.2	14,35	13			
3.3	6.52	62	7.3	14,57	13			
3.4	6.70	59	7.4	14,80	12			
3.5	6.85	57	7.5	15,02	12			
3.6	7.00	54	7.6	15,24	11			
3.7	7.16	52	7.7	15,46	11			
3.8	7.33	49	7.8	15,68	11			
3.9	7.49	47	7.9	15,90	11			
4.	7.64	45	8.	16,11	10			
4.1	7.85	43	8.1	16,33	10			
4.2	8.05	41	8.2	16,55	9,7			
4.3	8.25	39	8.3	16,77	9,4			
4.4	8.45	37	8.4	16,98	9,2			
4.5	8.65	35	8.5	17,17	9,0			
4.6	8.85	34	8.6	17,36	8,8			
4.7	9.05	32	8.7	17,57	8,6			
4.8	9.25	31	8.8	17,78	8,4			
4.9	9.47	30	8.9	17,98	8,2			


DN 40

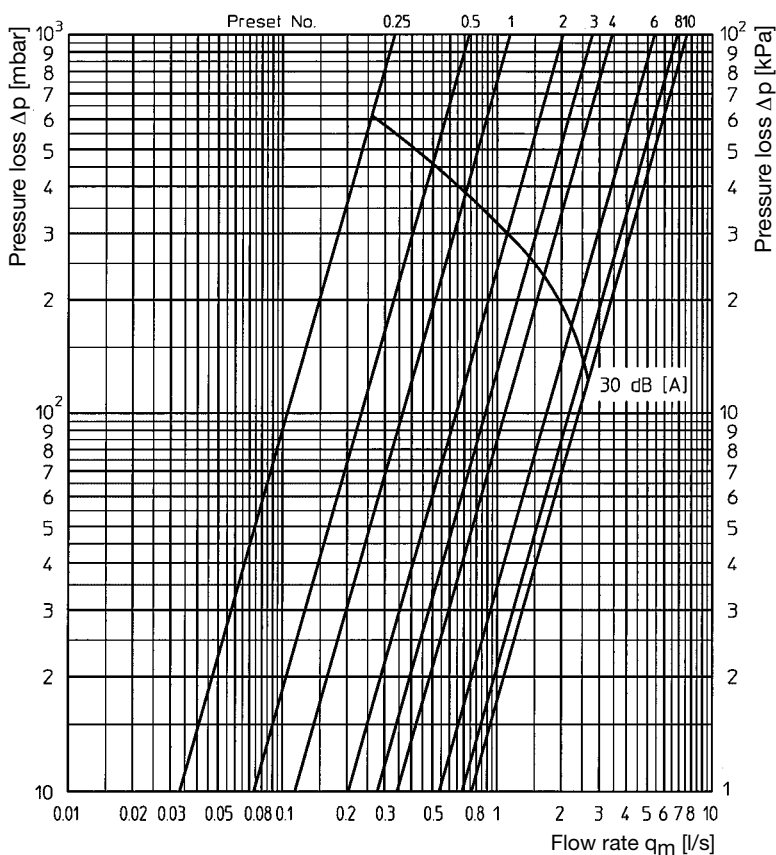

Turn	$k_V$ -value	Zeta-value	Turn	$k_V$ -value	Zeta-value	Turn	$k_V$ -value	Zeta-value
0.25	1.20	3390						
0.5	2.66	690						
0.75	3.54	390						
1.	4.13	286						
1.1	4.46	245	5.	15,26	21	9	26,09	7,2
1.2	4.78	214	5.1	15,65	20	9.1	26,24	7,1
1.3	5.10	188	5.2	16,10	19	9.2	26,38	7,0
1.4	5.42	166	5.3	16,55	18	9.3	26,52	6,9
1.5	5.74	148	5.4	16,95	17	9.4	26,66	6,9
1.6	6.06	133	5.5	17,35	16	9.5	26,80	6,8
1.7	6.38	120	5.6	17,80	15	9.6	26,94	6,7
1.8	6.70	109	5.7	18,20	15	9.7	27,08	6,7
1.9	7.02	99	5.8	18,65	14	9.8	27,22	6,6
			5.9	19,05	13	9.9	27,37	6,5
2.	7.34	91	6.	19,45	13	10.	27,51	6,4
2.1	7.62	84	6.1	19,75	13			
2.2	7.89	78	6.2	20,05	12			
2.3	8.16	73	6.3	20,35	12			
2.4	8.43	69	6.4	20,65	11			
2.5	8.70	64	6.5	20,95	11			
2.6	8.97	61	6.6	21,25	10			
2.7	9.24	57	6.7	21,55	10			
2.8	9.51	54	6.8	21,85	10			
2.9	9.77	51	6.9	22,15	9,9			
3.	10,02	49	7.	22,45	9,7			
3.1	10,25	46	7.1	22,70	9,5			
3.2	10,50	44	7.2	22,95	9,3			
3.3	10,73	42	7.3	23,15	9,1			
3.4	10,97	41	7.4	23,35	9,0			
3.5	11,20	39	7.5	23,62	8,7			
3.6	11,43	37	7.6	23,87	8,6			
3.7	11,66	36	7.7	24,10	8,4			
3.8	11,90	34	7.8	24,35	8,2			
3.9	12,13	33	7.9	24,58	8,1			
4.	12,36	32	8.	24,82	7,9			
4.1	12,65	31	8.1	24,95	7,8			
4.2	12,95	29	8.2	25,07	7,7			
4.3	13,25	28	8.3	25,20	7,7			
4.4	13,52	27	8.4	25,32	7,6			
4.5	13,80	26	8.5	25,45	7,5			
4.6	14,10	25	8.6	25,57	7,5			
4.7	14,40	24	8.7	25,70	7,4			
4.8	14,70	23	8.8	25,83	7,3			
4.9	14,98	22	8.9	25,96	7,2			


Flow charts for double regulating and commissioning valves:

DN 50

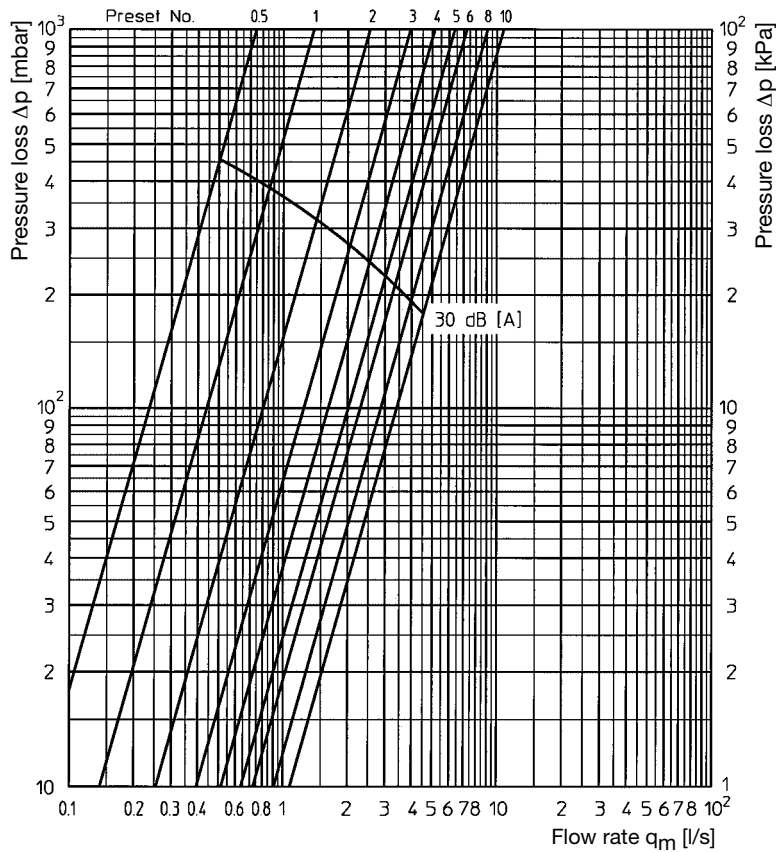

Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
0.5	2,69	1743						
0.75	4,17	726						
1.	5,06	493						
1.1	5,50	417	5.	22,93	24	9.	36,68	9,4
1.2	5,95	356	5.1	23,25	23	9.1	37,00	9,2
1.3	6,35	313	5.2	23,57	23	9.2	37,25	9,1
1.4	6,75	277	5.3	23,90	22	9.3	37,50	9,0
1.5	7,15	247	5.4	24,20	22	9.4	37,75	8,9
1.6	7,55	221	5.5	24,50	21	9.5	37,95	8,8
1.7	7,95	200	5.6	24,80	21	9.6	38,15	8,7
1.8	8,40	179	5.7	25,15	20	9.7	38,35	8,6
1.9	8,80	163	5.8	25,45	19	9.8	38,50	8,5
			5.9	25,80	19	9.9	38,65	8,5
2.	9,17	150	6.	26,09	19	10.	38,78	8,4
2.1	9,65	135	6.1	26,45	18			
2.2	10,15	122	6.2	26,80	18			
2.3	10,65	111	6.3	27,10	17			
2.4	11,15	101	6.4	27,45	17			
2.5	11,65	93	6.5	27,75	16			
2.6	12,15	85	6.6	28,05	16			
2.7	12,65	79	6.7	28,40	16			
2.8	13,20	72	6.8	28,75	15			
2.9	13,70	67	6.9	29,10	15			
3.	14,23	62	7.	29,41	15			
3.1	14,65	59	7.1	29,75	14			
3.2	15,10	55	7.2	30,10	14			
3.3	15,50	53	7.3	30,40	14			
3.4	15,95	50	7.4	30,75	13			
3.5	16,35	47	7.5	31,10	13			
3.6	16,80	45	7.6	31,45	13			
3.7	17,25	42	7.7	31,80	12			
3.8	17,65	40	7.8	32,10	12			
3.9	18,10	39	7.9	32,45	12			
4.	18,50	37	8.	32,73	12			
4.1	19,00	35	8.1	33,15	11			
4.2	19,45	33	8.2	33,55	11			
4.3	19,85	32	8.3	33,90	11			
4.4	20,30	31	8.4	34,30	11			
4.5	20,70	29	8.5	34,70	10			
4.6	21,15	28	8.6	35,10	10			
4.7	21,60	27	8.7	35,50	10			
4.8	22,05	26	8.8	35,90	9,8			
4.9	22,50	25	8.9	36,30	9,6			

DN 65

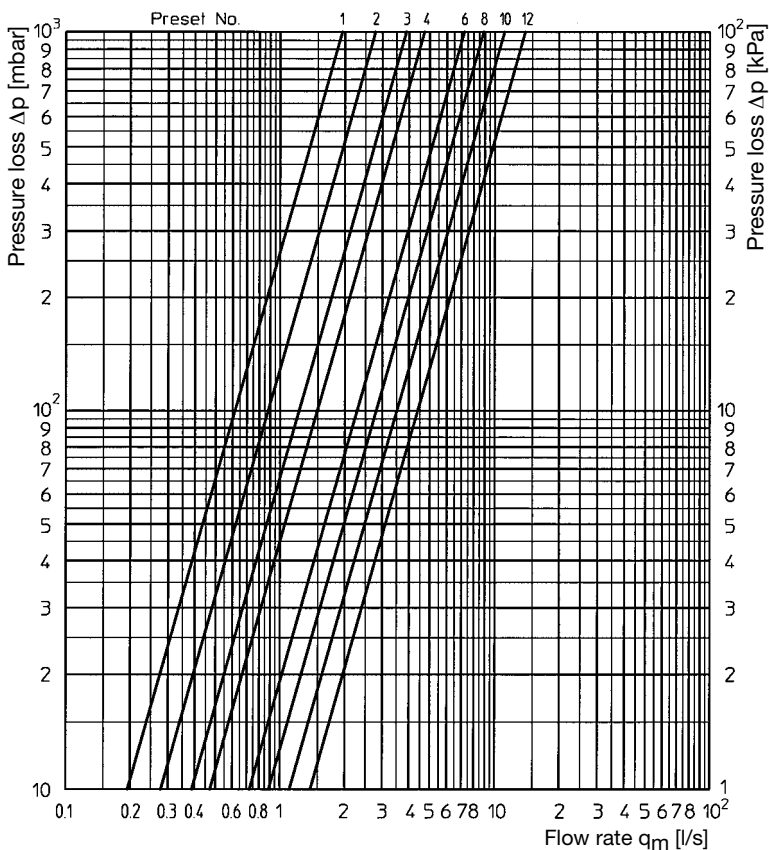


Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value	Turn	$k_v$ -value	Zeta-value
1.	7,00	705	5.	22,00	71	9.	35,00	28
1.1	7,30	648	5.1	22,40	69	9.1	35,50	27
1.2	7,60	598	5.2	22,80	66	9.2	36,00	27
1.3	7,90	554	5.3	23,20	64	9.3	36,50	26
1.4	8,20	514	5.4	23,60	62	9.4	37,00	25
1.5	8,50	478	5.5	24,00	60	9.5	37,50	25
1.6	8,80	446	5.6	24,40	58	9.6	38,00	24
1.7	9,10	417	5.7	24,80	56	9.7	38,50	23
1.8	9,40	391	5.8	25,20	54	9.8	39,00	23
1.9	9,70	367	5.9	25,60	53	9.9	39,50	22
2.	10,00	345	6.	26,00	51	10.	40,00	22
2.1	10,40	319	6.1	26,30	50	10.1	40,50	21
2.2	10,80	296	6.2	26,60	49	10.2	41,00	21
2.3	11,20	275	6.3	26,90	48	10.3	41,50	20
2.4	11,60	257	6.4	27,20	47	10.4	42,00	20
2.5	12,00	240	6.5	27,50	46	10.5	42,50	19
2.6	12,40	225	6.6	27,70	45	10.6	43,00	19
2.7	12,80	211	6.7	27,90	44	10.7	43,50	18
2.8	13,20	198	6.8	28,10	44	10.8	44,00	18
2.9	13,60	187	6.9	28,30	43	10.9	44,50	17
3.	14,00	176	7.	28,50	43	11.	45,00	17
3.1	14,30	169	7.1	28,50	42	11.1	45,50	17
3.2	14,60	162	7.2	29,10	41	11.2	46,00	16
3.3	14,90	156	7.3	29,40	40	11.3	46,50	16
3.4	15,20	150	7.4	29,70	39	11.4	47,00	16
3.5	15,50	144	7.5	30,00	38	11.5	47,50	15
3.6	15,80	138	7.6	30,40	37	11.6	48,00	15
3.7	16,10	133	7.7	30,80	36	11.7	48,50	15
3.8	16,40	128	7.8	31,20	35	11.8	49,00	14
3.9	16,70	124	7.9	31,60	35	11.9	49,50	14
4.	17,00	120	8.	32,00	34	12.	50,00	14
4.1	17,50	113	8.1	32,30	33			
4.2	18,00	107	8.2	32,60	33			
4.3	18,50	101	8.3	32,90	32			
4.4	19,00	96	8.4	33,20	31			
4.5	19,50	91	8.5	33,50	31			
4.6	20,00	86	8.6	33,80	30			
4.7	20,50	82	8.7	34,10	30			
4.7	21,00	78	8.8	34,40	29			
4.9	21,50	75	8.9	34,70	29			

**Isolating and orifice valve "Hydrocontrol A" without presetting - flow tolerances for double regulating and commissioning valves both ports with connections for measuring technic "classic"**

Dimensions identical to those of double regulating and commissioning valves **with** presetting


**Tender specification:**

Isolating and orifice valve PN 25, both ports with female thread according to EN 10226 (BS 21) and isolating and orifice valve PN 16, both ports with male thread and collar nut for weldable, solder and threaded tailpipes, flat sealing, between -20°C and +150°C, not suitable for steam, colour rings for marking of supply and return pipe, oblique pattern. Valve body and bonnet made of brass (Rg 5), disc and stem made of brass resistant to dezincification (DZR), disc with PTFE soft seal, maintenance-free stem seal due to double O-ring. Installation in the supply or the return pipe. DN 10 to DN 50 with type approval certificate for shipbuilding.



Bronze isolating and orifice valve with female thread (threaded ports for accessories closed with blind plugs)


DN 10 ( 3/8" )	106 75 03
DN 15 ( 1/2" )	106 75 04
DN 20 ( 3/4" )	106 75 06
DN 25 ( 1" )	106 75 08
DN 32 ( 1 1/4" )	106 75 10
DN 40 ( 1 1/2" )	106 75 12
DN 50 ( 2" )	106 75 16
DN 65 ( 2 1/2" )	106 75 20



Bronze isolating and orifice valve with male thread and collar nut (threaded ports for accessories closed with blind plugs)

DN 10 ( 3/8" )	106 76 03
DN 15 ( 1/2" )	106 76 04
DN 20 ( 3/4" )	106 76 06
DN 25 ( 1" )	106 76 08
DN 32 ( 1 1/4" )	106 76 10
DN 40 ( 1 1/2" )	106 76 12
DN 50 ( 2" )	106 76 16

Accessories:  
1 fill and drain ball valve 106 01 91

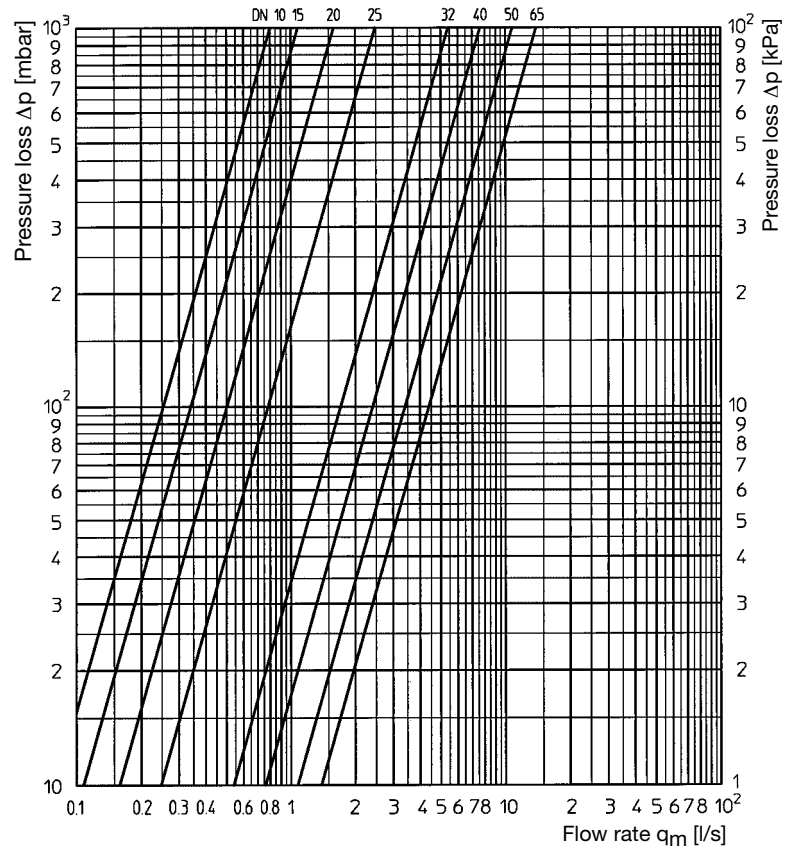

**Tailpipe sets:**

**2 weldable tailpipes**

3/8"	106 05 91
1/2"	106 05 92
3/4"	106 05 93
1"	106 05 94
1 1/4"	106 05 95
1 1/2"	106 05 96
2"	106 05 97

**2 solder tailpipes**

15 mm	DN 15	106 10 92
18 mm	DN 20	106 10 93
22 mm	DN 20	106 10 94
28 mm	DN 25	106 10 95
35 mm	DN 32	106 10 96
42 mm	DN 40	106 10 97


**2 tailpipes with male thread**

3/8"	106 14 91
1/2"	106 14 92
3/4"	106 14 93
1"	106 14 94
1 1/4"	106 14 95
1 1/2"	106 14 96


**2 tailpipes with female thread**

1/2"	101 93 64
3/4"	101 93 66
1"	106 13 94
1 1/4"	106 13 95

**Flow tolerances depending on the presetting (double regulating and commissioning valves item no. 106 01/02/03/05):**

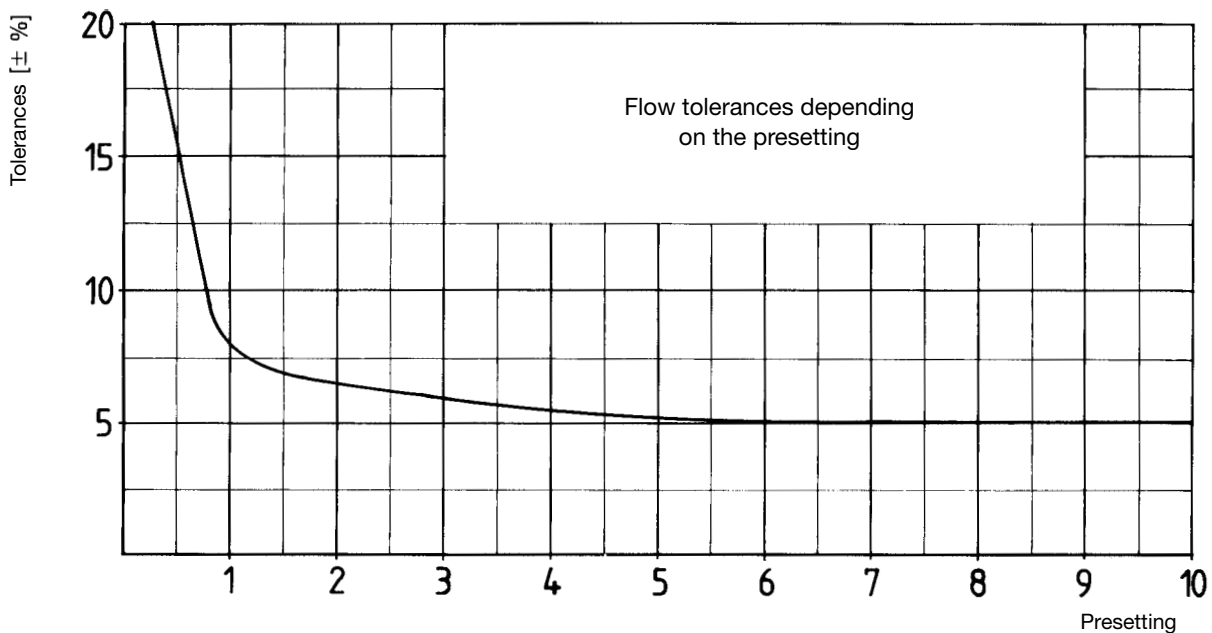

**Insulation shells:**

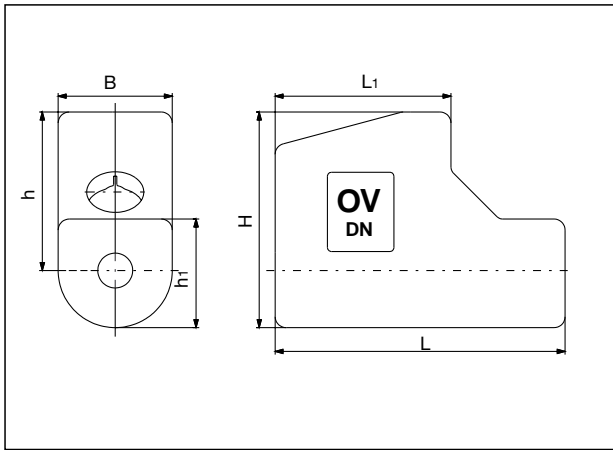

**Tender specification:**

Insulation shells made of Polyurethane, double shells with tongue-and-groove fitting.

**Item nos.:**


DN 10	106 00 81
DN 15	106 00 81
DN 20	106 00 82
DN 25	106 00 83
DN 32	106 00 84
DN 40	106 00 85
DN 50	106 00 86

**Dimensions:**

DN	B	L	L <sub>1</sub>	H	h	h <sub>1</sub>
15	72	183	111	136	100	69
20	80	195	122	143	103	77
25	88	243	141	151	107	85
32	102	254	149	172	121	97
40	109	250	152	185	131	105
50	125	276	163	209	147	120

**Presetting:**

- The value of presetting of the valve is set by turning the handwheel.
- The display of the basic setting is shown by the longitudinal scale together with the sliding indicator. Each turn of the handwheel is represented by a line on the longitudinal scale.
- The display of the fine setting is shown by the peripheral scale on the handwheel together with the marking. The subdivisions of the peripheral scale correspond to 1/10<sup>th</sup> of a turn of the handwheel.
- Limitation of the set value of presetting by turning the inner adjustment stem clockwise until it seats. This can be done by using the long end of a 3 mm Allen key.

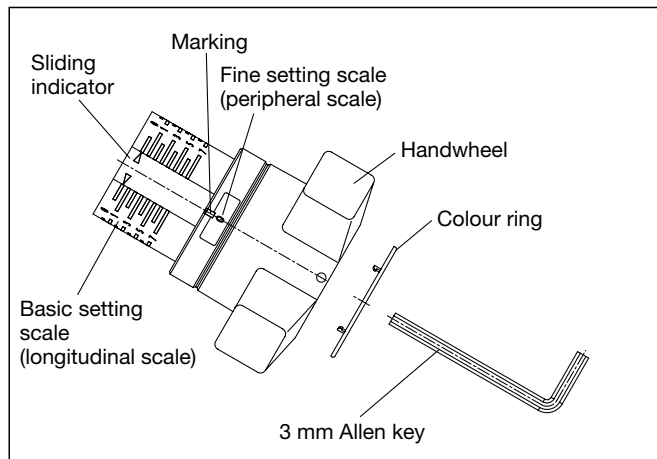

**Marking of the flow and return pipe:**

Clip one of the colour rings (red = supply, blue = return) supplied with each valve onto the handwheel.


**Installation advice:**

Oventrop double regulating and commissioning valves serve to achieve the hydronic balance between the various circuits of a system. It is therefore to be observed that the direction of flow conforms with the arrow on the valve body. The flow


tolerance is ± 5%. If installed against the flow, an increase in the flow rate of 1-3%, related to the chart value, must be considered.

**Correction factor for mixtures of water and glycol:**

When antifreeze liquids are added to the heating water, the values given in the chart must be multiplied by the correction factor f.

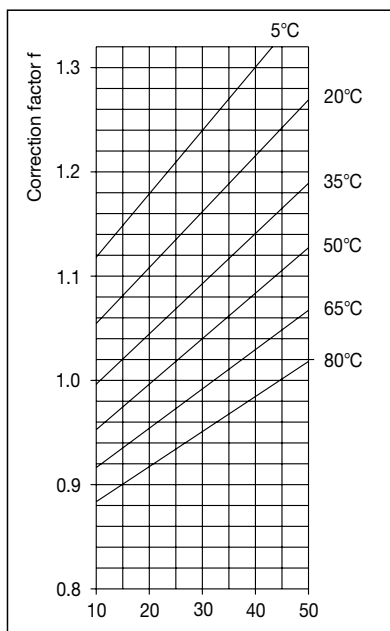

Weight proportion of ethylene glycol [%]

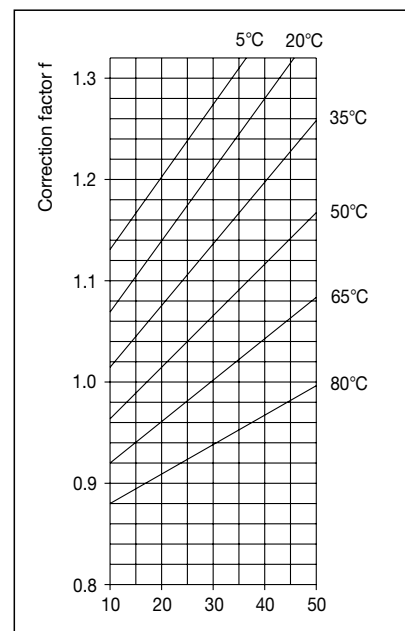

Weight proportion of propylene glycol [%]

## Measuring and regulation

### Oventrop flow-meter "OV-DMC 2" (with memory and microprocessor)

featuring numerous functions and a wide range of applications:

- flow rate indication (indication in m<sup>3</sup>/h, l/s, l/min, l/h, gal/min)
- differential pressure measuring (indication in mbar, kPa, PSI, mm WG, m WG)
- temperature measuring (indication in °C or °F)
- presetting Arriving at the presetting value based on the measured differential pressure, the given flow rate and the valve size.

The characteristic lines of all Oventrop regulating valves DN 10 – DN 300 are memorised in the flow-meter.

With the use of a respective kv value, it is possible to carry out measurements on valves of other manufacturers.

(For practical use of the "OV-DMC 2", special operating instructions are available.)



Flow-meter "OV-DMC 2", item no. 106 91 77 with "Hydrocontrol R"

### Oventrop differential pressure gauge (without memory and microprocessor)

Pocket size differential pressure gauge for practical use on site for checking  $\Delta p$  in conjunction with Oventrop regulating valves.

To measure static pressure, connection of one only sensor is necessary. Digital indication in kPa units.



Electronic differential pressures gauge, item no. 106 91 52 with "Hydrocontrol R"

Subject to technical modification without notice.

Product group 3  
ti 19-1/10/8.2005/MW

Printed on paper free from  
chlorine bleaching.

OVENTROP UK LTD.  
Unit 1 – The Loddon Centre  
Wade Road  
Basingstoke, Hampshire RG24 8FL  
Telephone (0 1256) 330441  
Telefax (Sales) (0 1256) 330525  
Telefax (General) (0 1256) 470970  
E-Mail sales@oventrop.co.uk

F. W. OVENTROP GmbH & Co. KG  
Paul-Oventrop-Straße 1  
D-59939 Olsberg  
Telephone (02962) 82-0  
Telefax (02962) 82-405  
Internet www.oventrop.de  
E-Mail mail@oventrop.de